

# AC 127

## Self Contained Ice Machine 75 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity



### FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.



AC L  
Large Gourmet 39 g  
Ø 38 mm - H 41 mm



AC M  
Medium Gourmet 20 g  
Ø 30 mm - H 34 mm

### CONDENSING SYSTEM

Water cooled  
Air cooled

### REFRIGERANT GAS

R290

### VOLTAGE V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
AC L	Large	38 mm	41 mm	39 g
AC M	Medium	30 mm	34 mm	20 g

### OPERATING REQUIREMENTS

### CERTIFICATIONS



	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

#### IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine 75 kg


January 2025

# AC 127

## Self Contained Ice Machine 75 kg

Item
Project
Quantity

Self Contained Ice Machine 75 kg

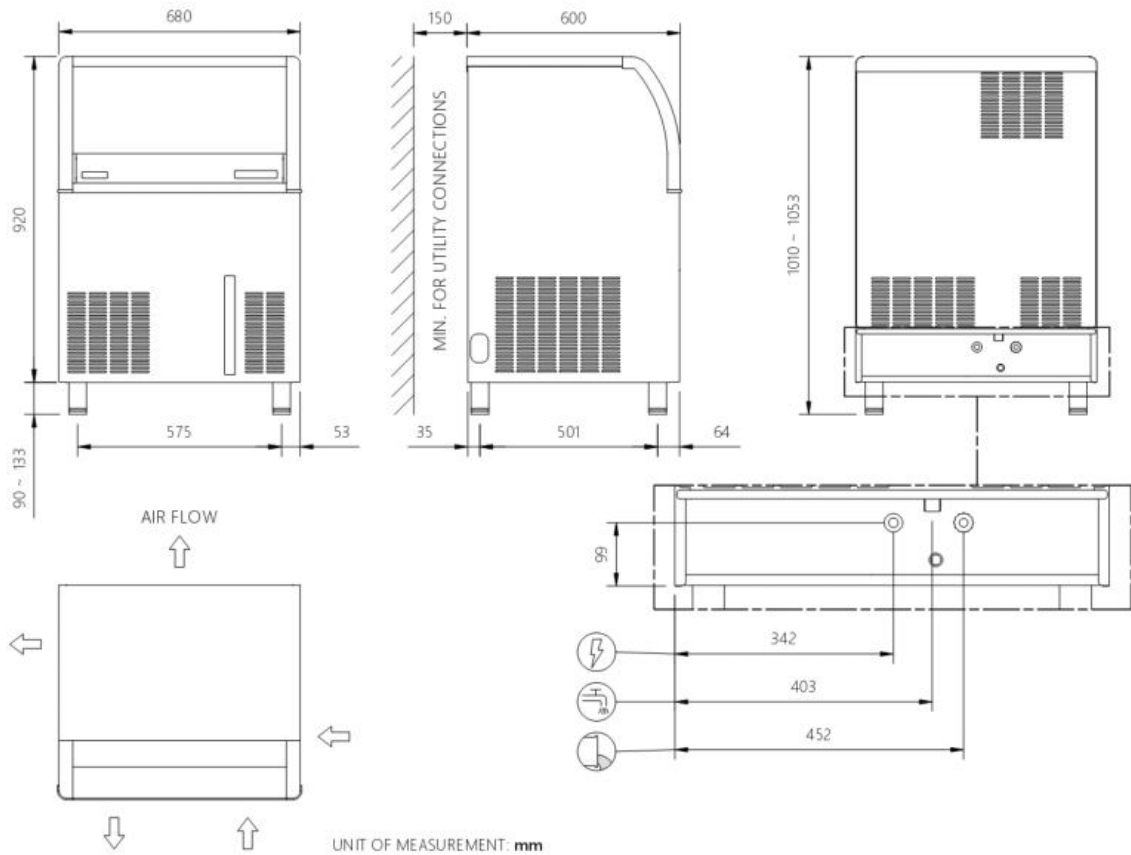

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)										
Net weight			Gross weight										
680 x 600 x 920 mm			750 x 670 x 1100 mm										
65 kg			75kg										
Version	Voltage	Condensation	24 h ice production kg C Amb. / °C Water			Cap bin kg	Heat Rejection kW	Energy Consumption (*) kWh/24h	Water Usage (*) l/h	instant power W	circuit wires No. x Ømm2	Max. Fuse Size A	
			10°C/10°C kg	21°C/10°C kg	32°C/21°C kg								
ACM 127 WS	230\50\1	W	75	71	62	39	1,1	10	49	490	3 x 1,5	10	
ACM 127 AS	230\50\1	A	70	68	52	39	1,1	11	8	650	3 x 1,5	10	
ACL 127 AS	230\50\1	A	63	60	40	23	1,1	13	10	650	3 x 1,5	10	